



SPECIFICATIONS:

Shall be a Model _____, gas fired hydraulic tilting skillet. The unit shall have a spring assisted hinged stainless steel cover, complete with handle and a no drip condensate guide. The pan body shall be front hinged for tilting and easy pour control. Formed from 10 gauge stainless steel with 5/8" thick stainless steel clad cooking surface for even heat distribution over entire cooking surface. The pan shall be mounted on a heavy duty welded angle constructed frame fitted with 6" (152mm) stainless steel legs with adjustable bullet feet on the front and flanged feet on the rear for securing to the floor. Enclosed with #4 finish type 304 stainless steel with removable side panels and two stainless steel front cabinet doors.

All controls are mounted in the cabinet base which include a solid state thermostat, temperature light, tilt switch, electronic ignition, tilt safety switch and hydraulic lift system powered by a 1/2 HP electric motor for smooth and precise tilting action. The high limit thermostat is located on the pan bottom. Cooking temperatures are between 150°F and 450°F (66°C and 232°C).

MODEL	CAPACITY	
BGMTS-30	30 Gallon	114 Liter
BGMTS-40	40 Gallon	152 Liter

OPERATION SHALL BE BY:

Gas fired skillet operating on 115 VAC, 1 Phase, 50/60Hz

- Natural gas
- L.P. gas

OPTIONAL ITEMS AT EXTRA COST:

- 240 VAC control circuit
- 220 VAC control circuit
- Vented pan cover


ACCESSORIES:

- Pan carrier
- Steam pan insert
- Double pantry faucet with swing spout
- Single pantry faucet with swing spout

Job _____
Item# _____



Models: □ BGMTS-30 □ BGMTS-40

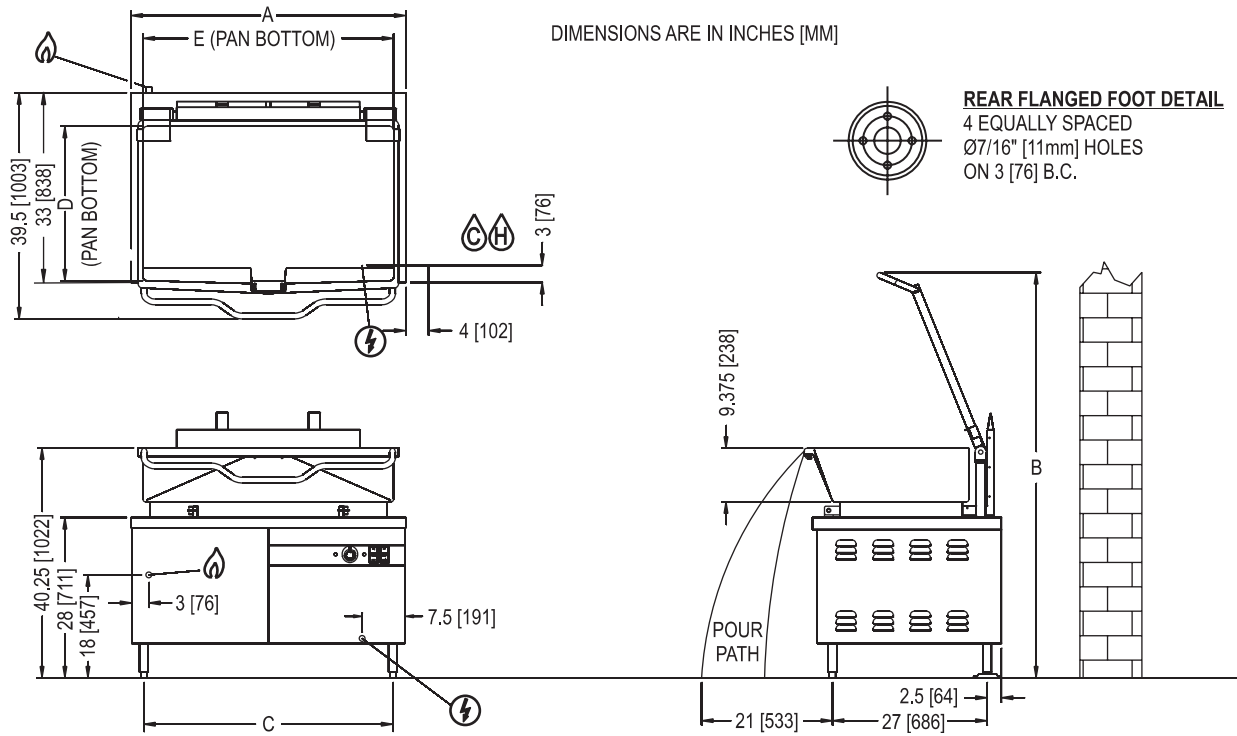

DIMENSIONS ARE IN INCHES [MM]

REAR FLANGED FOOT DETAIL
 4 EQUALLY SPACED
 Ø7/16" [11mm] HOLES
 ON 3 [76] B.C.

DIMENSIONS

MODEL	CAPACITY	UNITS	A	B	C	D	E
BGMTS-30	30 Gallons (114 liters)	inches (mm)	42.5" (1079)	68.0" (1727)	30.0" (762)	36.0" (914)	14.0" (356)
BGMTS-40	40 Gallons (152 liters)	inches (mm)	44.0" (1118)	68.0" (1727)	42.0" (1067)	48.0" (1219)	19.0" (483)

GAS CHARACTERISTICS

MODEL	BTU/HOUR	kW/HOUR	FUEL	WATER COLUMN PRESSURE
BGMTS-30	80,000	23.4	Natural	3.5" (89 mm)
			Propane	4" (102 mm)
BGMTS-40	100,000	29.3	Natural	3.5" (89 mm)
			Propane	4" (102 mm)

SERVICE CONNECTIONS

- 🔥 – GAS SUPPLY: 3/4" pipe with pressure of approximately 7" W.C. For Propane use 11" W.C. pressure. A gas shut-off valve must be installed in supply piping convenient and adjacent to appliance.
- ⚡ – ELECTRICAL CONNECTION: Unless otherwise specified, field connection to be 120v, 60 Hz single phase with grounding wire.

**INTENDED FOR COMMERCIAL USE ONLY.
 NOT FOR HOUSEHOLD USE.**



1100 Old Honeycutt Road, Fuquay-Varina, NC 27526
 (919) 762-1000 www.southbendnc.com